



IDRATEK

INTELLIGENT AUTOMATION

ALS-001 Light Level Sensor


IDRATEK LTD
8 Clanfield Court
Newcastle Upon Tyne
NE3 1TZ
UK

t: +44 191 2840686
w: www.idratek.com



The information in this document is provided for guidance only. IDRATEK Ltd reserve the right to make any necessary changes, without notice, in order to improve the quality of their products.

The 8 bit Light Level Sensing module provides a means of measuring ambient light levels either for monitoring or control purposes. This unit is not intended to provide an absolute measure of Lux levels but rather a repeatable measure of local light levels to enable practical operations such as dusk/dawn lighting or curtain control. As with other IDRATEK modules a range of 'Reflex' functions is provided to allow control of other network devices based on light level conditions.

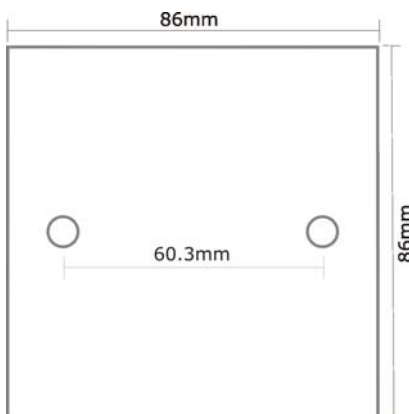

Sensor Characteristics

- Module output range: 0 (dark) - 255 (bright)
- Resolution over range: 8 bits monotonic
- Spectral response of sensor: similar to human eye (~480-650nm)
- Measurement characteristics: Logarithmic with additional internal time response damping

Functional

- Light level value can be interrogated at any time
- Five independent event triggers:
 - Light level equals or exceeds user defined 'High' limit
 - Light level equals or falls below user defined 'Low' limit
 - Light level difference exceeds user defined 'Delta' limit (auto-datuming)
 - Time interval trigger (ranges: 1-127 seconds/1- 127 minutes)
 - Module Initialise trigger
- User defined trigger enabling pattern
- Each event trigger can generate a pre-defined response and/or several user programmable responses
- Status indicator LED
- Fully IDRANet Compatible

Electrical

- Operating voltage 12-15V DC
- Current consumption 18mA (nominal)


Environmental

- Operating temperature -10°C to +45°C
- Operating humidity 5% to 95% (non-condensing)

Mechanical

- Designed to fit UK standard 35mm deep electrical pattress
- 60.3mm fixing centres using standard M3.5 screws

Interfaces (front)

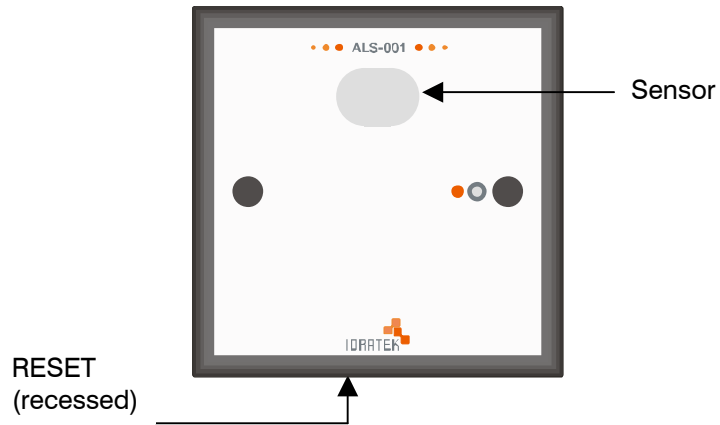

Interfaces (rear)

