



# IDRATEK

INTELLIGENT AUTOMATION

## LTS-001

### Light Level + Temperature + 2 Digital inputs

© IDRATEK LTD  
w: [www.idratek.com](http://www.idratek.com)



*The information in this document is provided for guidance only. IDRATEK Ltd reserve the right to make any necessary changes, without notice, in order to improve the quality of their products.*

This module combines light level sensing, high resolution temperature sensing and 2 digital inputs in one package. Saving space and cost where both ALS and DTS module functions may be required (eg. for lighting and climate control applications) as well as providing digital inputs for external sensors. As with other IDRATEK modules a range of 'Reflex' functions is provided to allow control of other network devices based on light level, temperature and digital input conditions.



#### Light Sensor Charactersitics

- Module output range: 0 (dark) - 255 (bright)
- Resolution over range: 8 bits monotonic
- Spectral response of sensor: similar to human eye (~480-650nm)
- Measurement characteristics: Logarithmic with additional internal time response damping

#### Temperature Sensor Specifications<sup>1</sup>


- Range: Beyond module operating limits (of -10°C to +45°C)
- Resolution: 0.03125°C
- Accuracy: +/- 0.5°C over module range
- Internal sensor sampling period: ~4 seconds

#### Digital Inputs

- 2 General purpose non isolated (internally pulled high to 3.3V)

#### Functional

- Temperature, Light level and digital input values can be interrogated at any time
- 11 independent event triggers:
  - 2 x Digital Inputs state change trigger
  - Temperature equals or exceeds user defined 'High' limit
  - Temperature equals or falls below user defined 'Low' limit
  - Temperature difference exceeds user defined 'Delta' limit (auto-datuming)
  - Temperature time interval trigger (ranges: 1-127 seconds/1-127 minutes)
  - Light level equals or exceeds user defined 'High' limit
  - Light level or falls below user defined 'Low' limit
  - Light level difference exceeds user defined 'Delta' limit (auto-datuming)
  - Light level Time interval trigger (ranges: 1-127 seconds/1-127 minutes)
  - Module Initialise trigger
- User defined trigger enabling pattern
- Each event trigger can generate a pre-defined response and/or several user programmable responses.
- Status indicator LED
- In-situ reprogrammable firmware

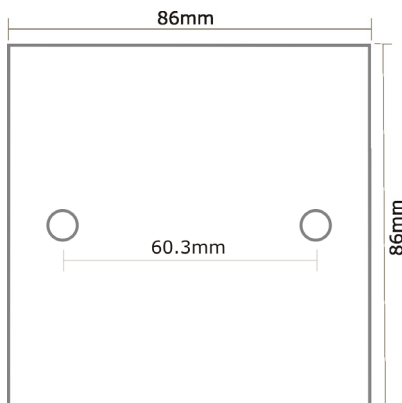

#### Electrical

- Operating voltage 12-15V DC
- Current consumption 9mA (nominal)

#### Environmental

- Operating temperature -10°C to +45°C
- Operating humidity 5% to 95% (non-condensing)


#### Mechanical

- Designed to fit UK standard 35mm deep electrical pattress
- 60.3mm fixing centres using standard M3.5 screws



<sup>1</sup> Manufacturers Data Sheet

Interfaces (front)

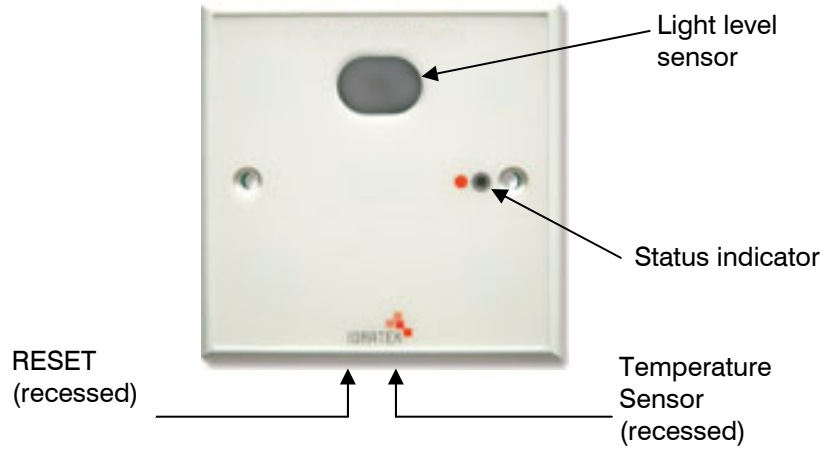

Interfaces (rear)

